



For Residential and Commercial Flat Roofs Canopy Style Elevated Racking System

- Provides 9 foot or Higher Elevation for Fire Access
- Allows Full Access under Array for Multiple Usage
- Distributed Foot Design to attach to Standard Rafters
- Sleeper/Spreaders Available for full load distribution

UL 2703
Certified

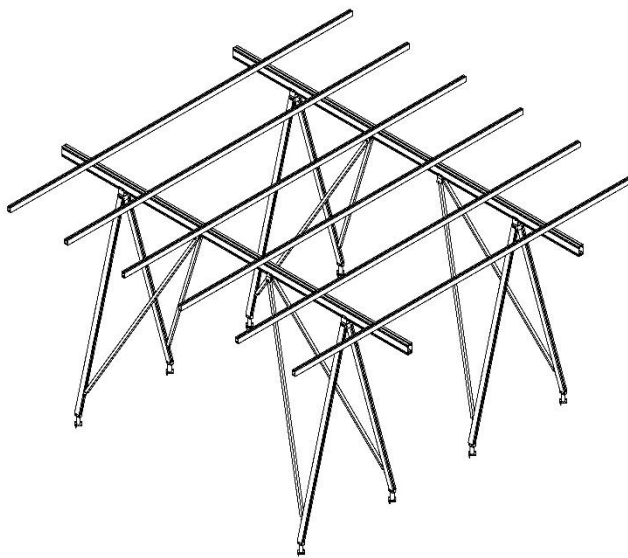

Standard

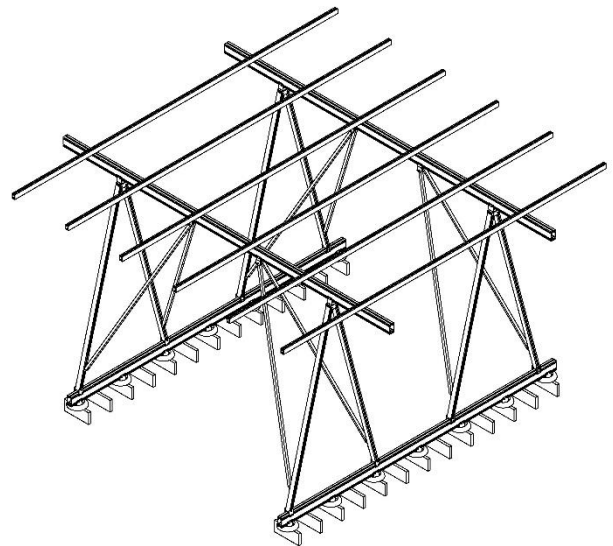

Sleeper/Spreader

- Maximum Recommended Span: ISA3x2: 12 Ft.; ISA 4x3: 16 Ft.
Maximum Recommended Cantilever: ISA 3x2: 4 Ft.; ISA 4x3: 5 Ft.
- Anchoring: Flanged Base or Sleepers with Rafter Anchors
- Materials: 6000 Series Aluminum with 300 Series Stainless Fasteners.
- Weight: 1 Lb. per square foot
- Warranty: 20 Years
- 2703 Certified
- Manufactured in USA

Getting Started

ISA partners with you throughout the Project:

Customer Provides:

- Size of the array, kW – or Helioscope
- Roof Size - or provide address
- Desired Tilt and Elevation

For Proposal ISA provides:

- 3D Layout of solar array shown on roof
- Roof mounting details – roof posts and locations
- Preliminary Assessment of Roof Structural Capacity

For Permitting ISA provides:

- Mechanical Drawings of Racking and Mounting – Suitable for Permitting
- Stamped Structural Analysis

Upon Ordering ISA provides:

- System Kit Customized for project
- Instruction Manual that applies to the project
- Tech Support during installation